



Yuasa Technical Data Sheet

Yuasa YBX3014 - YBX3000 SMF Batteries

* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	500A

Dimensions

Length	232mm
Width	175mm
Height	225mm

Weights & Measures

Mean Weight with Acid	15.5kg
-----------------------	--------



Container Features

Case Type	JIS D23
Cell Layout	1
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Recommended Charge Rate	✓
Performance Marking	4A
	W3-C2-V2-E1

Terminal Type

T1


Standard DIN Post

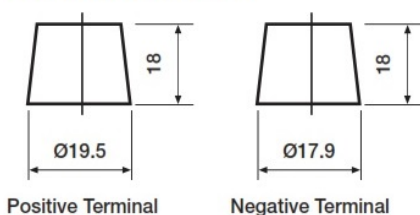

Positive Terminal

Negative Terminal

Cell Assembly Layout

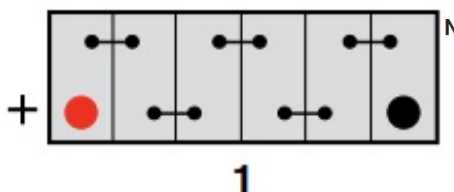

1

Battery Hold-down



Data Sheet generated on 30/11/2020 - E&OE