

# BPOWER 627 HD 145Ah 900A




Manufactured for users of trucks, heavy construction and agricultural machinery. The main advantage of these batteries is high starting current. Increased performance parameters ensure long and safe operation and a special envelope separator prevents the active mass from falling to the bottom of the battery.

BASIC PARAMETERS		TECHNOLOGY	
Nominal voltage (V)	12	Technology	Ca/Ca
Nominal capacity 20HR (Ah)	145	Performance marking	W4 - C2 - V3 - E1
Cold cranking perform. (EN -18°C)	900	Electrolyte density in 25°C	1.28 ± 0.01g/cm3
Recom. charging current	14.5A		
PHYSICAL PARAMETERS		CASE FEATURES	
Dimensions (L x W x H)	513 x 189 x 217 mm	Case type	DIN A
Weight (kg)	36,80	Hold down	N
Terminal type	T1	Handles	✓
Case material	Polipropylen PP	Cell layout	3
		Lid type	Raised plug


## Terminal type

T1



## Cell layout

3

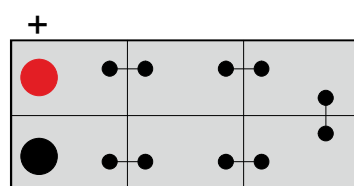

## Battery hold down

N



**Headquarters in Warsaw**  
Jana Kazimierza 61  
01-267 Warszawa

**Branch in Gdansk**  
Twarda 12  
80-871 Gdańsk

+48 22 877 54 96  
biuro@baterie.com.pl  
www.baterie.com.pl

**BP BATERIE**  
PRZEMYSŁOWE